




# 機械の外形図

標準

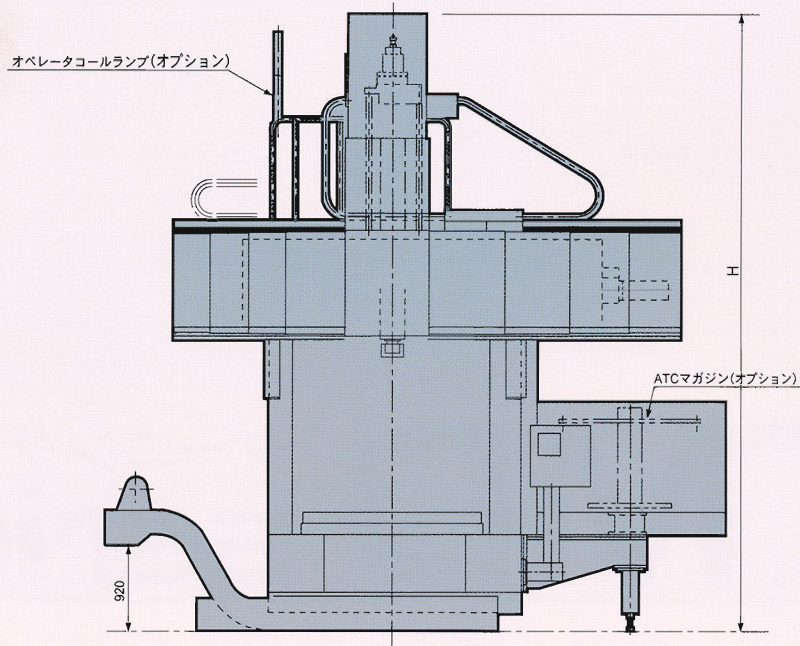

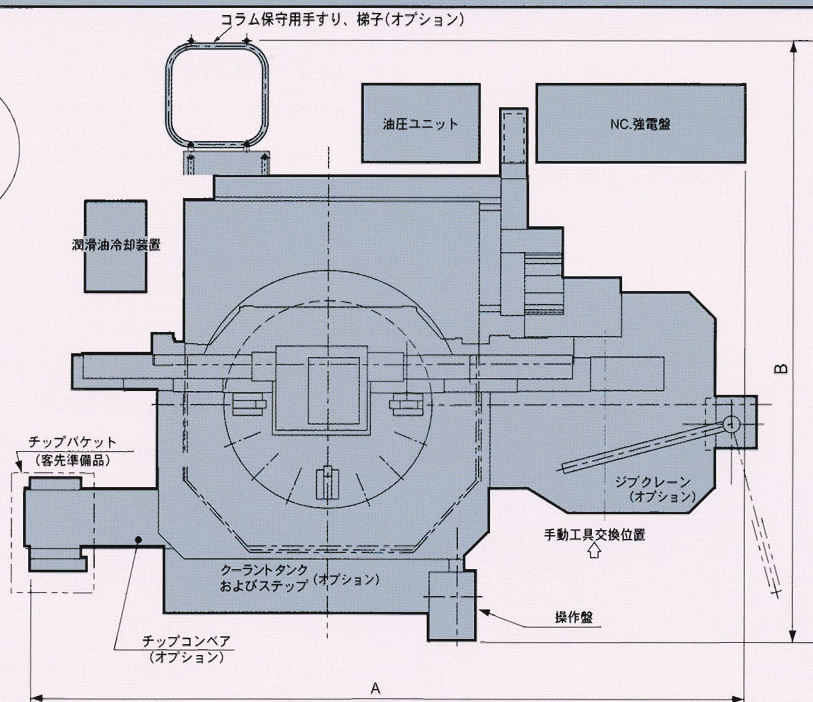

■標準の場合

mm

|   | TMD-13 | TMD-16 | TMD-20 |
|---|--------|--------|--------|
| A | 5 740  | 6 080  | 6 670  |
| B | 4 460  | 4 805  | 5 750  |
| H | 5 335  | 5 585  | 6 385  |

■APC付の場合

mm

|                | TMD-13 | TMD-16 | TMD-20 |
|----------------|--------|--------|--------|
| A              | 6 620  | 7 360  | 8 400  |
| A <sub>1</sub> | 2 750  | 3 350  | 4 200  |
| A <sub>2</sub> | 3 870  | 4 010  | 4 200  |
| B              | 6 520  | 7 320  | 8 885  |
| B <sub>1</sub> | 2 970  | 3 540  | 4 475  |
| B <sub>2</sub> | 3 550  | 3 780  | 4 410  |
| H              | 5 335  | 5 585  | 6 385  |

